Sealweld®

VALVE & ACTUATOR INTEGRITY MADE EASY

Valve Care Products

Buyer's Guide

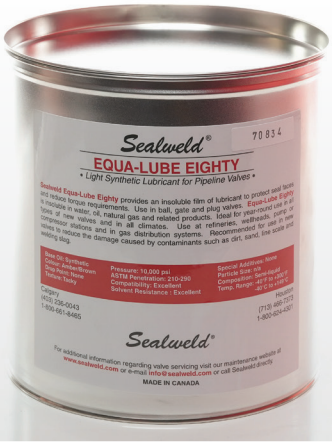

SEALWELD EQUA-LUBE EIGHTY

Sealweld Equa-Lube #80 is our most economical and lightweight synthetic lubricant is the perfect solution for commissioning new pipeline valves. This high-quality lubricant is designed to provide exceptional performance while remaining cost-effective and easy to handle. Its lightweight formula makes it easy to transport and apply, saving time and effort during the commissioning process. With our synthetic lubricant, you can ensure that your pipeline valves operate smoothly and efficiently, reducing the risk of costly repairs or downtime. Trust in our proven formula to keep your pipeline valves functioning at their best for years to come.

Sealweld Equa-Lube #80 forms a durable, insoluble lubricating film that safeguards critical seal faces and minimizes torque requirements. The prompt application of Sealweld Equa-Lube #80 immediately following hydrostatic testing either at the valve manufacturing facility or upon installation significantly extends the service life of valves by effectively purging any residual test water from the seat pockets, where corrosion is likely to occur. Furthermore, this product provides robust protection against potential damage caused by line contaminants—including dirt, sand, saltwater, and line scale—during start-up procedures.

Notably,Sealweld Equa-Lube #80 is insoluble in water as well as in crude oil, natural gas, condensate, and related by-products. It is recommended for use with ball valves, gate valves and plug valves with minimal to no wear concerns; it can also be utilized in orifice fittings. This lubricant is suitable for new valves as well as those used in wellhead applications, pump and compressor stations, transmission lines, and gas distribution systems.

Sealweld Equa-Lube #80 is designed for optimal performance throughout all seasons across various climatic conditions.

PRODUCT SPECIFICATION	
Base Oil	Synthetic
Colour	Amber/Brown
Composition	Semi-liquid
Temperature Range	- 40°C to + 149°C - 40°F to + 300°F

SIZE	MATERIAL #
400 lb. drum	421853
120 lb. pail	421881
40 lb. pail	421884
10 lb. pail	421880
15 Oz. cartridge - 12 per/case	421900
11 Oz. cartridge - 16 per/case	421897
J" Stick - 16 per/case	421882
16 oz. brush top can - 12 per/case	421888

SEALWELD #106 4116
64 AVE SE CALGARY
AB T2C 2B3

SEALWELD USA LLC #118
15431 VANTAGE PKWY E.
SUITE 210, HOUSTON, TX 77032

WWW.SEALWELD.COM
SALES@SEALWELD.COM
1-855-SEA1ANT